EASY MEASURING & ORDERING

Ordering your new Silver Line window couldn't be easier. We do all the work at the factory to make our window fit your opening. Because we do, you don't have the messy work of altering or removing siding, drywall or exterior trim often needed with other windows used for "replacement".

Just follow the simple instructions and refer to the diagrams for measuring. This is the time when being sure counts the most. Carefully mark down the dimensions in the chart below and bring this sheet to your Silver Line Dealer. He will then order your windows and when they arrive, you will find that we did all the work in the factory to make them fit - so you wouldn't have to at home.

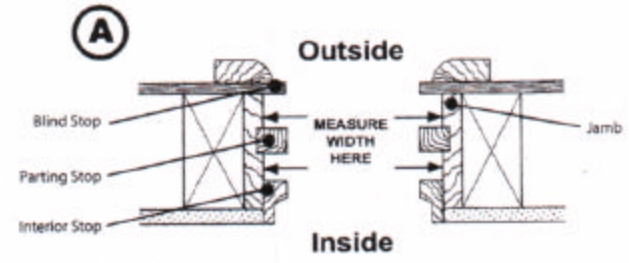

Measuring the window opening

Note: These instructions are for a double-hung window.

A. Width

- Measure the width of the opening from jamb to jamb, behind the trim or stops.
- Measure 3 places: at top, bottom and center. Use the smallest width measurement of the three.

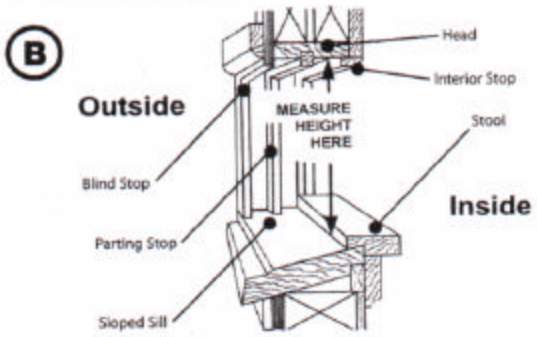

B. Height

- Measure the height from the highest point of the sloped sill to the inside of the head jamb, behind the interior stop, as shown.
- Measure 3 places: left, right and center. Use the smallest height measurement of the three.

Room	Window Type	Width	Height	Quantity
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	
			X	